

CAMSO TM R4



COMPACT
WHEEL LOADERS



DURABLE OFF-ROAD PERFORMANCE

Provides incomparable durability and traction for heavy-duty applications. Enhanced tread cleanout and lug stability combine to maximize its performance.

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO TM R4



HAULER STEPPED TREAD DESIGN

- Enhances tread cleanout for improved traction

OPTIMIZED LUG-TO-VOID RATIO

- Enhances longevity and tread puncture resistance



HEAVY-DUTY CARCASS


- Provides excellent stability and side impact resistance

TAPERED TREAD LUGS

- Improves lug stability for even wearing

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRA CODE	APPLICATION	MAXIMUM TIRE LOAD [lb]							
											On other vehicles					On counterbalanced lift trucks		
											Inflation pressure [PSI]	Creep	10 km/h 6 mph	15 km/h 9 mph	50 km/h 30 mph	Inflation pressure [PSI]	Load wheel	Steering wheel
18-19.5	16	14x19.5	-	44.0	17.9	40	160	A8	R-4	DRIVE	64	20050	13900	13200	8950	79	14200	11900
405/70-20 (16/70-20)	14	13x20	13SDC	42,7	15,9	34	154	A8	R-4	FREE	50	13650	11600	11000	7450	79	11850	9950
				42,7	15,9	34	142			DRIVE	50	13750	8200	7800	5250	79	11850	9950
18-22.5	16	14x22.5	-	47,6	17,5	44	163	A8	R-4	DRIVE	64	21750	15050	14300	9700	79	15400	12900
400/80-24 (15.5/80-24)	16	13x24	13SDC	49,0	16,2	47	156	A8	R-4	CONSTANT	57	20300	11050	10000	8500	-	-	-
				49,0	16,2	47	156			CYCLIC	57	20300	13250	11850	8500	-	-	-
400/80-24 (15.5/80-24)	20	13x24	13SDC	48,7	16,1	47	162	A8	R-4	CONSTANT	71	24100	13100	11850	10050	-	-	-
				48,7	16,1	47	162			CYCLIC	71	24100	15750	14050	10050	-	-	-
440/80-24 (16.5/85-24)	22	DW14Lx24	DW13	17,8	42	168	A8	R-4	CONSTANT	71	28396	15679	14074	11850	-	-	-	
			DW13L DW15L						52,3	17,8	42	168	CYCLIC	71	28396	19136	16420	11850

IMPROVED MOUNTABILITY

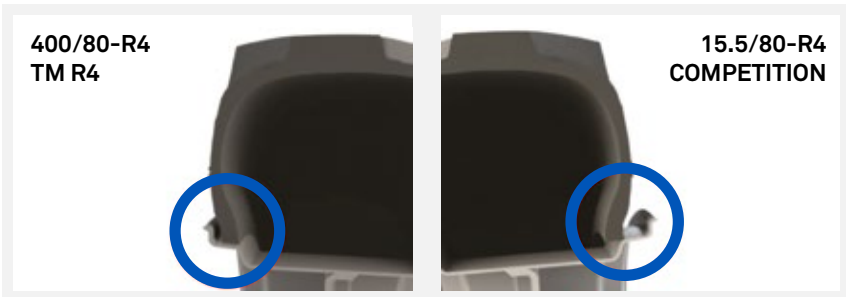

Increased tension on rim prior to inflation compared to competition designed to prevent air leakage during inflation process.

AUTHORIZED DISTRIBUTOR:

camso.co

