

CAMSO LM L3



WHEEL LOADERS



MULTI-SURFACE PERFORMANCE

Delivers optimized performance on all surfaces. With enhanced side impact resistance and improved stability, it reduces flats and improves ride quality in all types of applications.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



CAMSO

ROAD
FREE
COMPANY

CAMSO LM L3



HEAVY-DUTY CARCASS

- Increases side impact resistance and stability

STEPPED TREAD DESIGN

- Enhances tread cleanout for improved traction




NON-DIRECTIONAL TREAD PATTERN WITH OPTIMIZED LUG-TO-VOID RATIO

- Ensures even tread wearing for greater durability

DEEP AND FLAT TREAD PROFILE

- Reduces tread crowning for improved durability

TIRE SIZE	PR	ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRA CODE	MAXIMUM TIRE LOAD [kg] VERSUS INFLATION PRESSURE [bar]											
		O.D [mm]	O.W [m]	O.T.D [mm]				2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	
15.5-25	12	12	1283	417	26	A2	L3	4250	4475	4675	4875	5100	5350	5600	-	-	-	-	
						A8	G3	3250	-	-	-	-	-	-	-	-	-	-	-
						B	E3	-	-	-	-	-	-	-	-	-	-	-	-
15.5-25	16	16	1285	407	26	A2	L3	4250	4475	4675	4875	5100	5350	5600	5800	6000	6150	6400	
						A8	G3	3250	3650	4000	-	-	-	-	-	-	-	-	-
						B	E3	2800	3000	-	-	-	-	-	-	-	-	-	-
17.5-25	12	12	1380	467	26	A2	L3	5050	5350	5600	5900	6150	-	-	-	-	-	-	
						A8	G3	-	-	-	-	-	-	-	-	-	-	-	-
						B	E3	-	-	-	-	-	-	-	-	-	-	-	-
17.5-25	16	16	1391	460	26	A2	L3	5050	5350	5600	5900	6150	6400	6650	6900	7100	7300	-	
						A8	G3	3850	4050	4250	-	-	-	-	-	-	-	-	-
						B	E3	3100	3350	-	-	-	-	-	-	-	-	-	-
17.5-25	20	20	1363	477	28	A2	L3	5050	5350	5600	5900	6150	6400	6650	6900	7100	7300	7500	
						A8	G3	3850	4050	4250	4450	4650	4850	5000	-	-	-	-	
						B	E3	3100	3350	-	-	-	-	-	-	-	-	-	
20.5-25	16	16	1503	545	32	A2	L3	6700	7100	7500	7900	8250	-	-	-	-	-	-	
						A8	G3	5150	5450	-	-	-	-	-	-	-	-	-	
						B	E3	-	-	-	-	-	-	-	-	-	-	-	
20.5-25	20	20	1512	552	30	A2	L3	6700	7100	7500	7900	8250	8550	8875	9200	9500	-	-	
						B	E3	5150	5450	5750	6000	-	-	-	-	-	-	-	
						A2	L3	8500	9000	9500	10000	10400	10900	-	-	-	-	-	
23.5-25	20	20	1620	635	37	A2	L3	8500	9000	9500	10000	10400	10900	-	-	-	-	-	
						B	E3	6550	6950	7300	-	-	-	-	-	-	-	-	
						A2	L3	8500	9000	9500	10000	10400	10900	11300	11700	12100	12500	-	
23.5-25	24	24	1630	630	37	A2	L3	11000	11500	12050	12650	13200	-	-	-	-	-	-	
						B	E3	6550	6950	7300	7650	8000	-	-	-	-	-		
						A2	L3	11000	11500	12050	12650	13200	-	-	-	-	-	-	
26.5-25	20	20	1752	691	40	A2	L3	11000	11500	12050	12650	13200	-	-	-	-	-	-	
						B	E3	8250	-	-	-	-	-	-	-	-	-	-	
						A2	L3	11000	11500	12050	12650	13200	13600	14000	14500	15000	15500	-	
26.5-25	28	28	1767	690	40	A2	L3	11000	11500	12050	12650	13200	13600	14000	14500	15000	15500	-	
						B	E3	8250	8750	9250	9650	10000	-	-	-	-	-		
						A2	L3	12850	13600	14000	15000	15500	16000	17000	17500	-	-	-	
29.5-25	28	28	1873	770	36	A2	L3	12850	13600	14000	15000	15500	16000	17000	17500	-	-	-	
						B	E3	10000	10300	10900	11500	-	-	-	-	-	-		

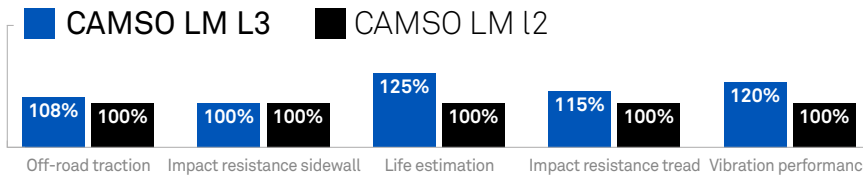

Durability and stability are key issues for loader applications on mixed and hard surfaces. Camso LM L3 enhances tread life and impact resistance with a high lug-to-void ratio and engineered non-directional tread pattern. Additionally, a heavy-duty carcass improves stability.

AUTHORIZED DISTRIBUTOR:

camso.co

